
# Agri-Fab®

## OWNERS MANUAL

MODEL NO. 45-01792

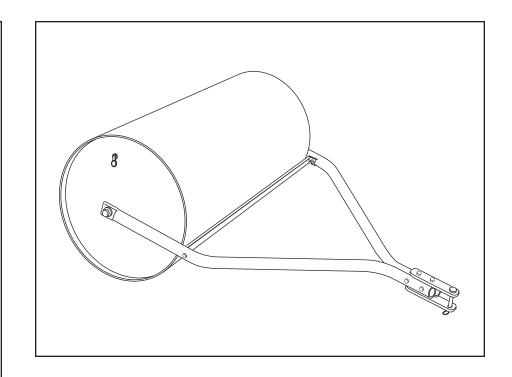

### **H.D. LAWN ROLLER**

(24" Dia. x 36" Wide)

#### SAFETY PRECAUTIONS

- Never attach a garden hose to the fill/drain hole when filling. Dangerous pressure build up could occur inside roller.
- 2. Do not fill roller to maximum weight without checking capability of vehicle to safely pull and stop.
- 3. Never use roller up and down hills; always work across hills and slopes.
- 4. Use caution when turning, slowing or stopping.
- 5. Always drain roller to keep from freezing.

#### **SPECIFICATIONS:**

Roller Drum: 24" Dia. x 36" Wide, Welded Steel

O.A. Width: Approximately 40"

Bearings: 1" I.D., Replaceable

Tow Hitch: Std. Pin Type - 1/2" Hole

Weight w/ Water: Up to 640 Lbs. Filled with Water

(Note: May be filled with sand)


Approx. Sh. Wt.: Approximately 105 Lbs.

#### **ASSEMBLY INSTRUCTIONS**

(SEE ILLUSTRATION BELOW)

- 1. Assemble bearings (Ref. 5) into hitch tubes (Ref. 3) so that bearing flange is against outside of hitch tube. (You may need to place a block of wood against bearing and carefully tap with a hammer.)
- Place hitch tubes (Ref. 3) onto both ends of roller shaft. Assemble a flat washer (Ref. 6) onto each end of roller shaft and secure with two cotter pins (Ref. 12).
- 3. Assemble scraper bar (Ref. 2) to hitch tubes (Ref. 3) using two hex bolts (Ref. 9) and hex lock nuts (Ref. 10). Do not tighten yet.
- 4. Assemble ends of hitch tubes (Ref. 3) together using two hex bolts (Ref. 7) and hex lock nuts (Ref. 10). Do not tighten yet.

- 5. Assemble hitch brackets (Ref. 4) to hitch tubes (Ref. 3) using two hex bolts (Ref. 8) and hex lock nuts (Ref. 10). Do not tighten yet.
- 6. **Tighten** bolts and nuts starting with scraper bar (Ref. 2), then ends of hitch tubes (Ref. 3), and finally hitch brackets (Ref. 4).
- 7. Install hitch pin (Ref. 13) through hitch brackets (Ref. 4) and secure with hair cotter pin (Ref. 14).
- 8. Adjust plug (Ref. 11) size by twisting handle. Lock plug in roller drum by flipping handle down.

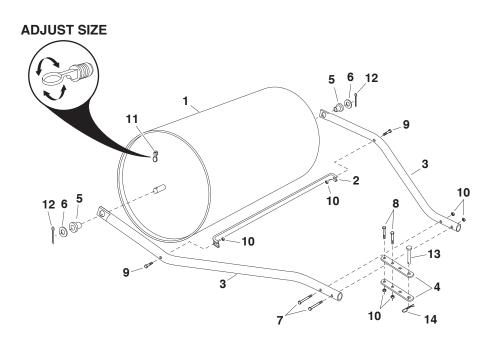

Ref. No.	Part No.	Qty.	Description	Ref. No.	Part No.	Qty.	Description
1		1	Roller Drum (Not sold separately)	8	43224	2	Hex Bolt, 5/16-18 x 2-1/4"
2	24867	1	Scraper Bar	9	43084	2	Hex Bolt, 5/16-18 x 1-3/4"
3	48361	2	Hitch Tube	10	47810	6	Hex Lock Nut, 5/16-18
4 (	24192	2	Hitch Bracket	11	49467	1	Plug, Lawn Roller
5	43632	2	Bearing, Plastic	12	43501	2	Cotter Pin, 5/32" x 1-1/2"
6	43528	2	Flat Washer, 1"	13	47623	1	Hitch Pin
7	46782	2	Hex Bolt, 5/16-18 x 3"	14	43343	1	Hair Cotter Pin 1/8"

#### **REPAIR PARTS**

Agri-Fab, Inc. 303 West Raymond Sullivan, IL. 61951 217-728-8388 www.agri-fab.com